

IT6300 系列

高性能三



e

FEATURE


- ！ (/
- ！
- /-0 0S / AF/ 0 AF0 *
- 0 AF0 1 AF1 k
- k AF/ AF0
- ！ AF/ 2T* /? AF0 6T* 0? k AF/ AF0
- (0 Krcrp TDB
-
-
- SQ@-EN@-PQ010
- (/ /
- (0 GR41...?-@-A (AF/ 0T AF0 2T



Model	Output Voltage / Current	Interface
IT6333C	60V/3A/180W*2CH 5V/3A/15W*1CH	LAN/USB/GPIB
IT6332C	30V/6A/180W*2CH 5V/3A/15W*1CH	LAN/USB/GPIB
IT6322C	30V/3A/90W*2CH 5V/3A/15W*1CH	LAN/USB/GPIB
IT6322B	30V/3A/90W*2CH 5V/3A/15W*1CH	USB/GPIB/RS232
IT6332B	30V/6A/180W*2CH 5V/3A/15W*1CH	USB/GPIB/RS232
IT6333B	60V/3A/180W*2CH 5V/3A/15W*1CH	USB/GPIB/RS232
IT6322A	30V/3A/90W*2CH 5V/3A/15W*1CH	USB/RS232
IT6332A	30V/6A/180W*2CH 5V/3A/15W*1CH	USB/RS232
IT6333A	60V/3A/180W*2CH 5V/3A/15W*1CH	USB/RS232
IT6322	30V/3A/90W*2CH 5V/3A/15W*1CH	USB/GPIB/RS232
IT6302	30V/3A/90W*2CH 5V/3A/15W*1CH	USB/RS232

Your Power Testing Solution

IT6300

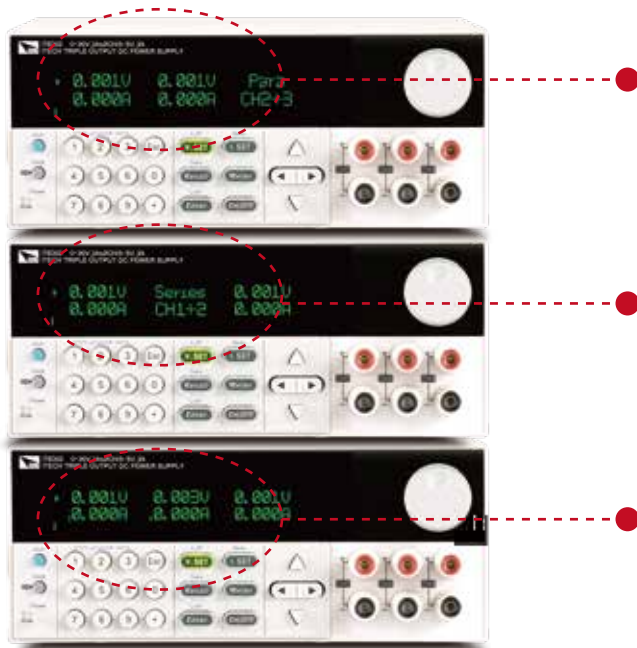

0.001V 0.001V Para
0.000A 0.000A CH2+3

0.001V Series 0.001V
0.000A CH1+2 0.000A

0.001V 0.003V 0.001V
0.000A 0.000A 0.000A

IT6300 Specifications

IT6322				IT6302				IT6322A/B				IT6332A/B				IT6333A/B			
	CH1	CH2	CH3	CH1	CH2	CH3		CH1	CH2	CH3		CH1	CH2	CH3		CH1	CH2	CH3	
*1	0~30V	0~30V	0~5V	0~30V	0~30V	0~5V		0~30V	0~30V	0~5V		0~30V	0~30V	0~5V		0~60V	0~60V	0~5V	
	0~3A	0~3A	0~3A	0~3A	0~3A	0~3A		0~3A	0~3A	0~3A		0~6A	0~6A	0~3A		0~3A	0~3A	0~3A	
	90W	90W	15W	90W	90W	15W		90W	90W	15W		180W	180W	15W		180W	180W	15W	
*2	$\leq 0.01\%+3\text{mV}$			$\leq 0.01\%+4\text{mV}$				$\leq 0.01\%+3\text{mV}$				$\leq 0.01\%+3\text{mV}$				$\leq 0.01\%+3\text{mV}$			
	$\leq 0.01\%+3\text{mA}$			$\leq 0.2\%+3\text{mA}$				$\leq 0.1\%+3\text{mA}$				$\leq 0.01\%+3\text{mA}$				$\leq 0.01\%+3\text{mA}$			
*2	$\leq 0.01\%+3\text{mV}$			$\leq 0.01\%+4\text{mV}$				$\leq 0.01\%+3\text{mV}$				$\leq 0.01\%+3\text{mV}$				$\leq 0.01\%+3\text{mV}$			
	$\leq 0.01\%+3\text{mA}$			$\leq 0.2\%+3\text{mA}$				$\leq 0.1\%+3\text{mA}$				$\leq 0.01\%+3\text{mA}$				$\leq 0.01\%+3\text{mA}$			
	1mV			10mV				1mV				1mV				1mV			
	1mA			1mA				1mA				1mA				1mA			
	1mV			10mV				1mV				1mV				1mV			
	1mA			1mA				1mA				1mA				1mA			
*3	$\pm 0.03\%+10\text{mV}$			$\leq 0.06\%+20\text{mV}$				$\leq 0.03\%+10\text{mV}$				$\leq 0.03\%+10\text{mV}$				$\leq 0.03\%+10\text{mV}$			
	$\pm 0.1\%+5\text{mA}$			$\leq 0.2\%+10\text{mA}$				$\leq 0.1\%+5\text{mA}$				$\leq 0.1\%+8\text{mA}$		$\leq 0.1\%+5\text{mA}$		$\leq 0.1\%+5\text{mA}$			
*3	$\pm 0.03\%+10\text{mV}$			$\leq 0.06\%+20\text{mV}$				$\leq 0.03\%+10\text{mV}$				$\leq 0.03\%+10\text{mV}$				$\leq 0.03\%+10\text{mV}$			
	$\pm 0.1\%+5\text{mA}$			$\leq 0.2\%+10\text{mA}$				$\leq 0.1\%+5\text{mA}$				$\leq 0.1\%+8\text{mA}$		$\leq 0.1\%+5\text{mA}$		$\leq 0.1\%+5\text{mA}$			
	$\leq 1\text{mVrms}/3\text{mVp-p}$			$\leq 5\text{mVp-p}/1\text{mVrms}$				$\leq 1\text{mVrms}/3\text{mVp-p}$				$\leq 1\text{mVrms}/4\text{mVp-p}$		$\leq 1\text{mVrms}/3\text{mVp-p}$		$\leq 1\text{mVrms}/4\text{mVp-p}$		$\leq 1\text{mVrms}/3\text{mVp-p}$	
	$\leq 3\text{mA}_{\text{rms}}$			$\leq 6\text{mA}_{\text{rms}}$				$\leq 3\text{mA}_{\text{rms}}$				$\leq 5\text{mA}_{\text{rms}}$		$\leq 4\text{mA}_{\text{rms}}$		$\leq 4\text{mA}_{\text{rms}}$			
	$\leq 0.05\%+10\text{mA}$			$\leq 0.2\%+15\text{mA}$				$\leq 0.02\%+5\text{mV}$				$\leq 0.02\%+5\text{mV}$				$\leq 0.02\%+10\text{mV}$			
	$\leq 0.02\%+5\text{mV}$			$\leq 0.2\%+30\text{mV}$				$\leq 0.1\%+20\text{mA}$				$\leq 0.1\%+30\text{mA}$				$\leq 0.1\%+30\text{mA}$			
	$\leq 0.1\%+20\text{mA}$			$\leq 0.2\%+25\text{mA}$				214.5mm*88.2mm*354.6mm				214.5mm*88.2mm*453.1mm				214.5mm*88.2mm*453.1mm			
	7.7kg			7.1kg				7.7kg				15kg				15kg			

*1 (0 - 40)

*2 (of output+o set)

*3 12

(25 °C ± 5 °C) (of output+o set)

*



www.itechate.com

Y Ô

ADD:
TEL: 86-25-52415098
FAX: 86-25-52415268

150

E-mail: sales@itechate.com
: 4006-025-000

