

SP26SL

SEMICONDUCTOR PARAMETER ANALYZER

30 μ V-200/1200V 1pA-100A





SP26

DC - I-V -

C-V

I-V

SP26

1200V
AC

100A

1pA

10kHz 3MHz

SP26



30μV-1200V
1pA-100A





0.03%



CV IV

SCPI

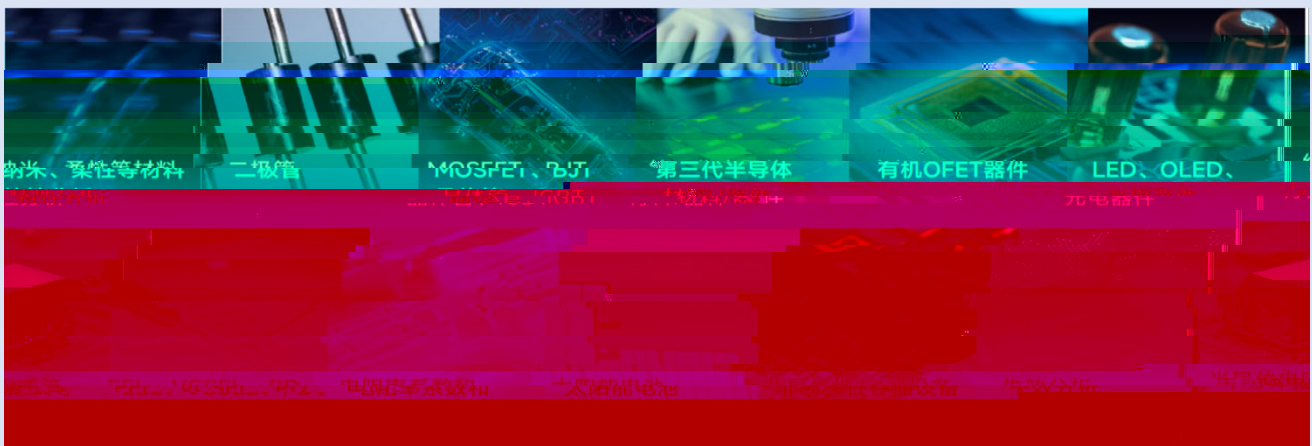


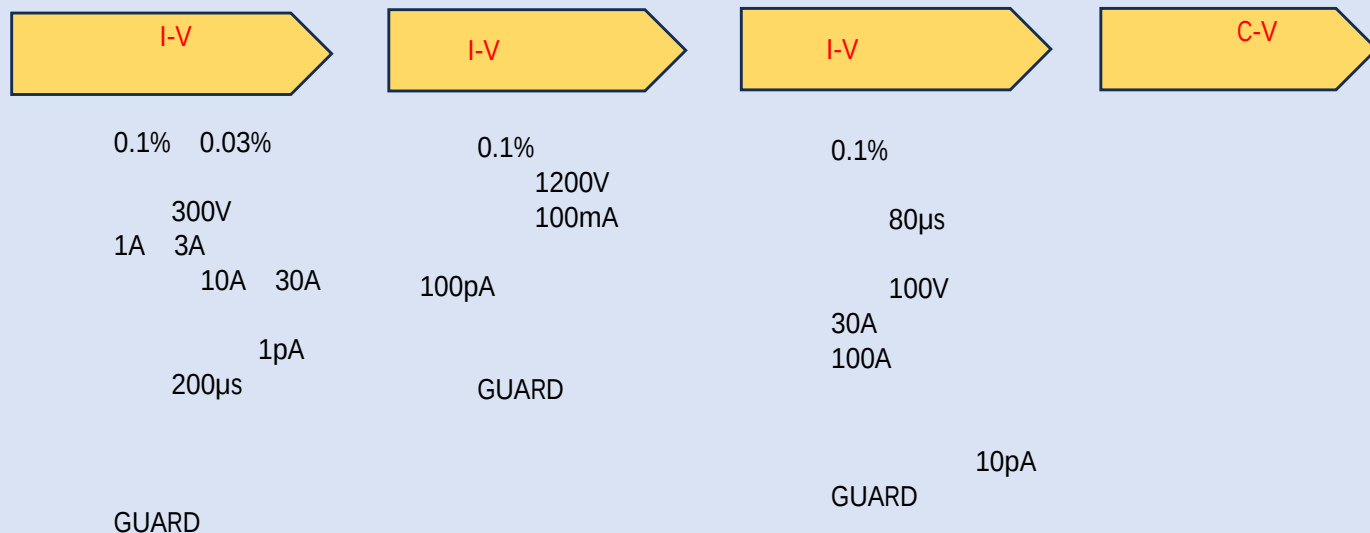


SMU - (I-V)
V





	I-V	I-V	I-V
	0.02%	0.10%	0.10%
	40V/200V	1200V	50V 100V
	100mV/200mV	100V	300mV
	5 μ V	10mV	30 μ V
	1A(DC) /10A(	100mA	30A /50A 30A /100A
	100n A	1 μ A	100nA
	2 pA	100pA	10pA
	100 μ s	N/A	80 μ s

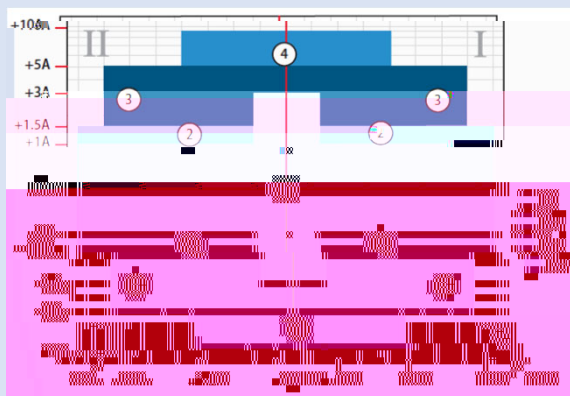


I-V

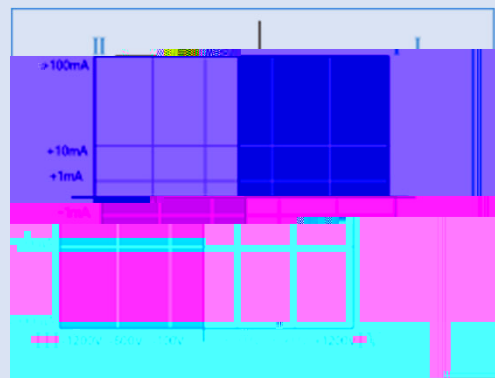

I-V

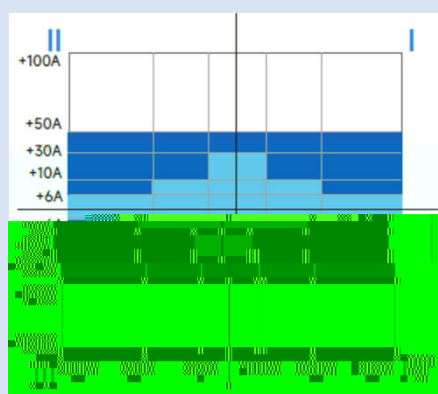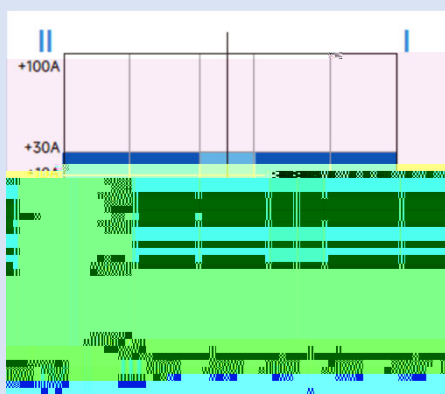

I-V

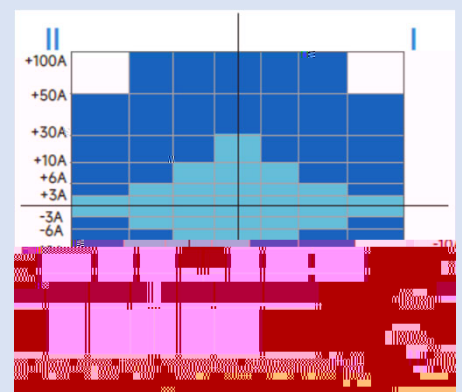

C-V

-

IGBT SiC MOS GaN

