


# HIOKI

日置

BT4560

BATTERY IMPEDANCE METER BT4560

NEW

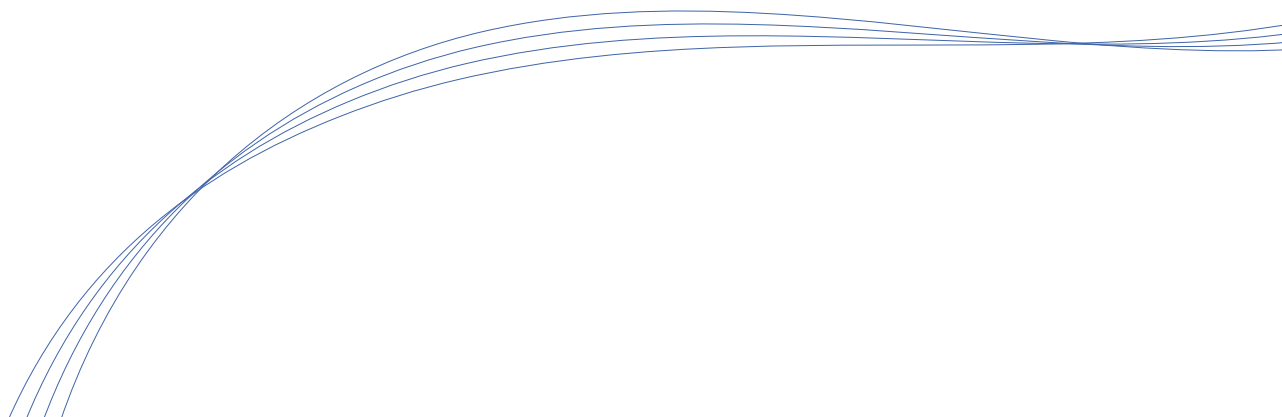

400-920-6010



[www.hioki.com](http://www.hioki.com)

3 year






EIS



BR4560 !

E<sub>0</sub>Q      k  
BR4560  
            k  
JAL  
k

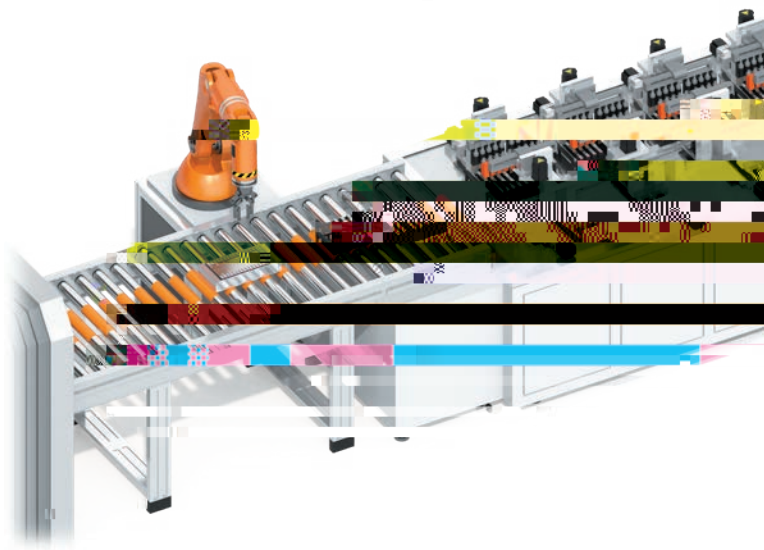

EIS







PC

EIS



## — Circuit Fitting

( - )

k

k

k

k

k

k

3D

k



ZView®

LabVIEW

for BT4560



EIS

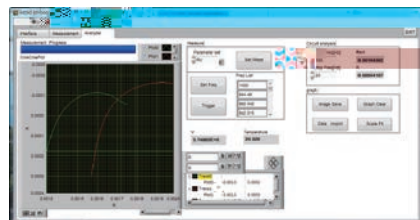



|  |                                   |
|--|-----------------------------------|
|  |                                   |
|  |                                   |
|  | R      X      Z      θ            |
|  | 0.01 Hz   1050 Hz                 |
|  | 0.01 Hz   0.99 Hz   0.01 Hz       |
|  | 1.0 Hz   9.9 Hz   0.1 Hz          |
|  | 10 Hz   99 Hz   1 Hz              |
|  | 100 Hz   1050 Hz   10 Hz          |
|  | 3.0000 mΩ, 10.0000 mΩ, 100.000 mΩ |
|  | 5 V                               |

|                  |      |       |      |
|------------------|------|-------|------|
|                  | FAST | MED   | SLOW |
| 0.01 Hz   66 Hz  | 1    | 2     | 8    |
| 67 Hz   250 Hz   | 2    | 8     | 32   |
| 260 Hz   1050 Hz | 8    | /   Û |      |

|  |                                                  |
|--|--------------------------------------------------|
|  | 5.00000 V(      )                                |
|  | 10 µV                                            |
|  | FAST   0.1 s, MED   0.4 s, SLOW   1.0 s<br>0.21s |

|  |                 |
|--|-----------------|
|  | -10.0      60.0 |
|  | 0.1             |
|  | 2.3 s           |

